


Type 433PW Series

Key Features

- Stable Infinite Resolution
- High Performance
- Wiper Idles at End Stop
- Rugged Construction
- Fully Sealed
- Panel Mount Available

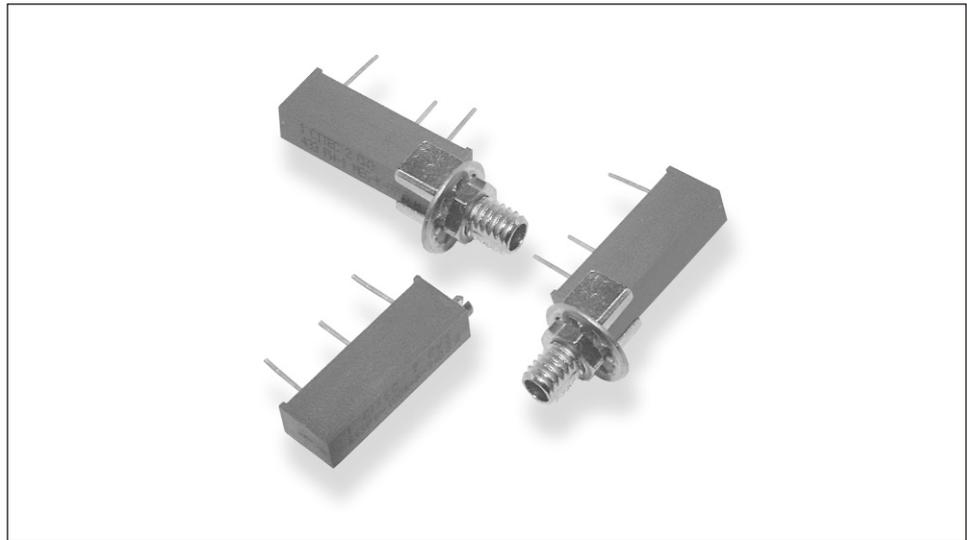

When you need a durable trimming potentiometer, these 19mm rectilinear styles offer quality performance at a competitive price. They feature a cermet element for stability and resolution and are available in two formats. Type 433 PW will withstand all recognised board-washing solvents and can be offered with panel mount for external adjustment.

Characteristics - Electrical

Resistance Range:	10 Ohms to 2M Ohms
STD Resistance Values:	1, 2 and 5 in each decade
STD Resistance Tolerance:	± 10%
End Resistance:	2 Ohms or 1% of total resistance, whichever is greater
Slider Current:	100 mA or within power rating maximum
Power Rating, Watts:	0.75 at 70°C derating to zero at 125°C
Isolation Voltage:	500 V dc or ac peak
Input Voltage:	400 V dc or ac RMS maximum
Breakdown Voltage:	1000 V ac for one minute
Insulation Resistance:	1000 M ohms at 100 V ac minimum
Resolution:	Essentially Infinite
Rotational Noise (CRV):	1 Ohm or 1 % of total resistance, whichever is greater
Temperature Coefficient:	± 250 ppm/°C maximum
Electrical Adjustment:	15 Turns Nominal

Characteristics - Mechanical


End Stop:	Slipping Clutch Both Ends
Starting Torque:	35mNm maximum
Weight:	1.4 grams maximum

Characteristics - Environmental


Temperature Range:	-55°C to +125°C
Temperature Storage:	1000 Hrs at 125°C
Thermal Shock:	5 Cycles -55°C to +125°C
Vibration Severity:	10 - 500Hz; 20G (0.75mm or 98m/s ²)
Rotational Life:	200 Cycles
Load Life at 70°C:	ΔR < 4% after 1000 Hours
Sealing:	Sealed for Board Washing
Climatic Category:	55/125/21
Shock:	50G

Type 433PW Series

Dimensions

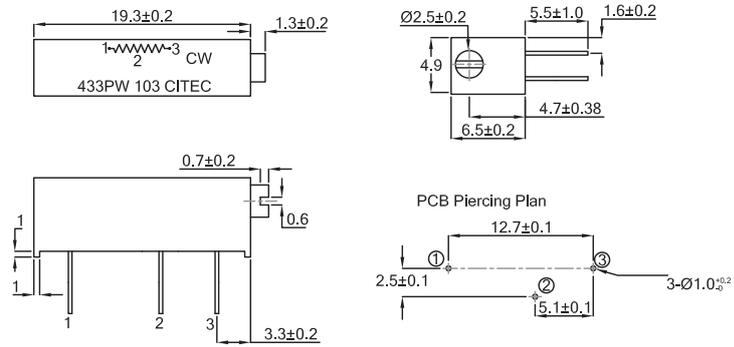

How to Order

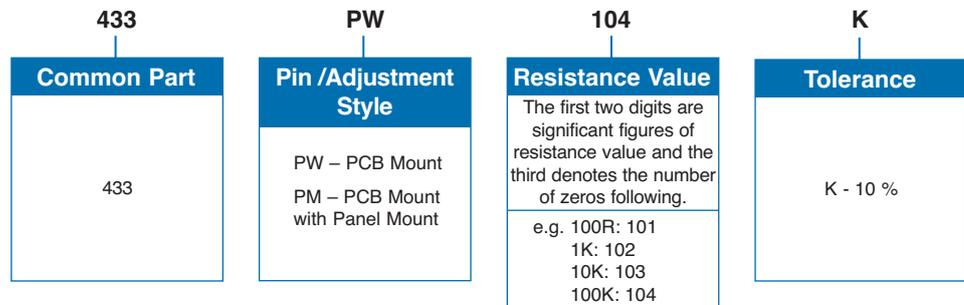

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.
Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.